

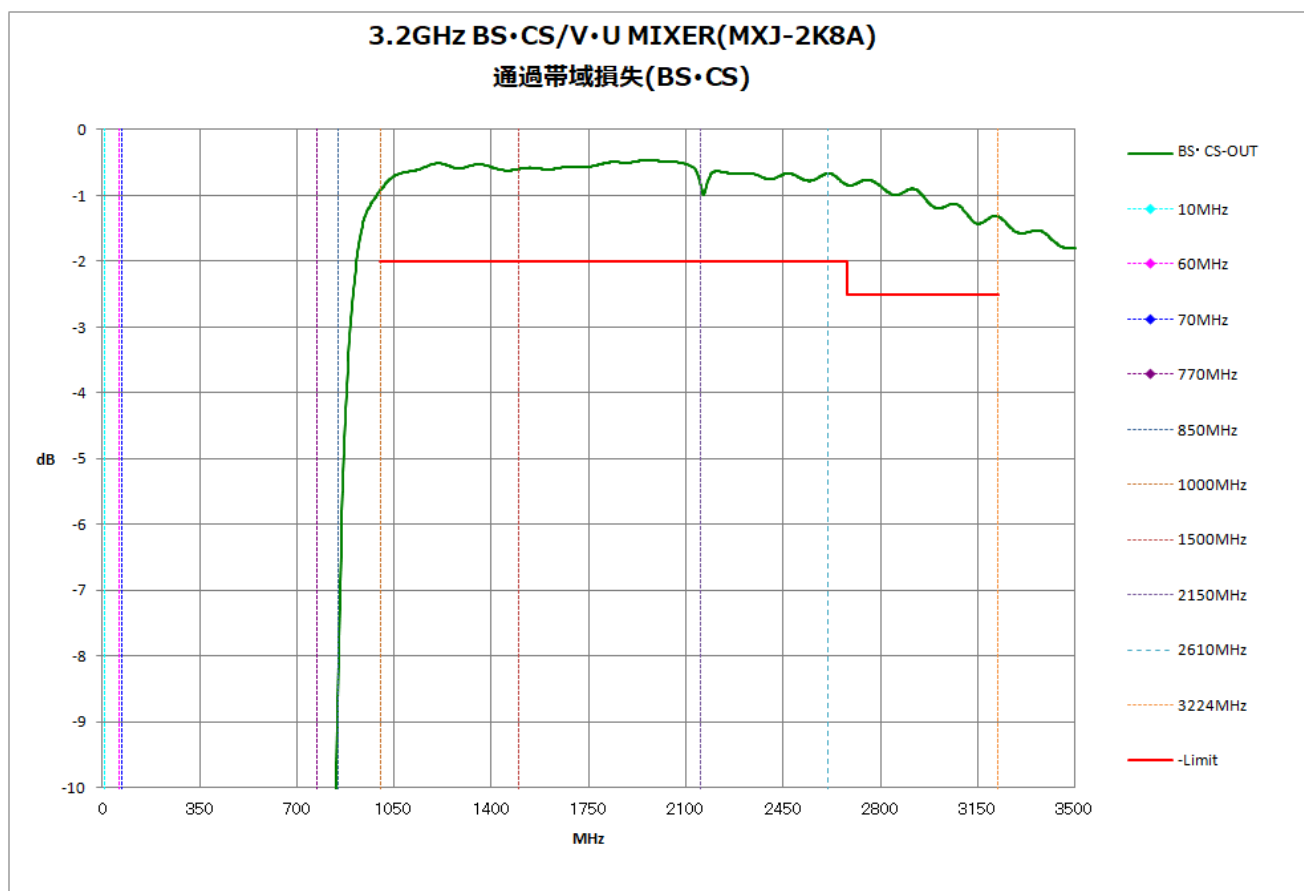



f	通過帯域損失 (V・U)	f	阻止帯域減衰量 (BS・CS)
60MHz	-0.080	1000MHz	-40.405
70MHz	-0.085	1500MHz	-41.448
770MHz	-0.828	3224MHz	-36.009

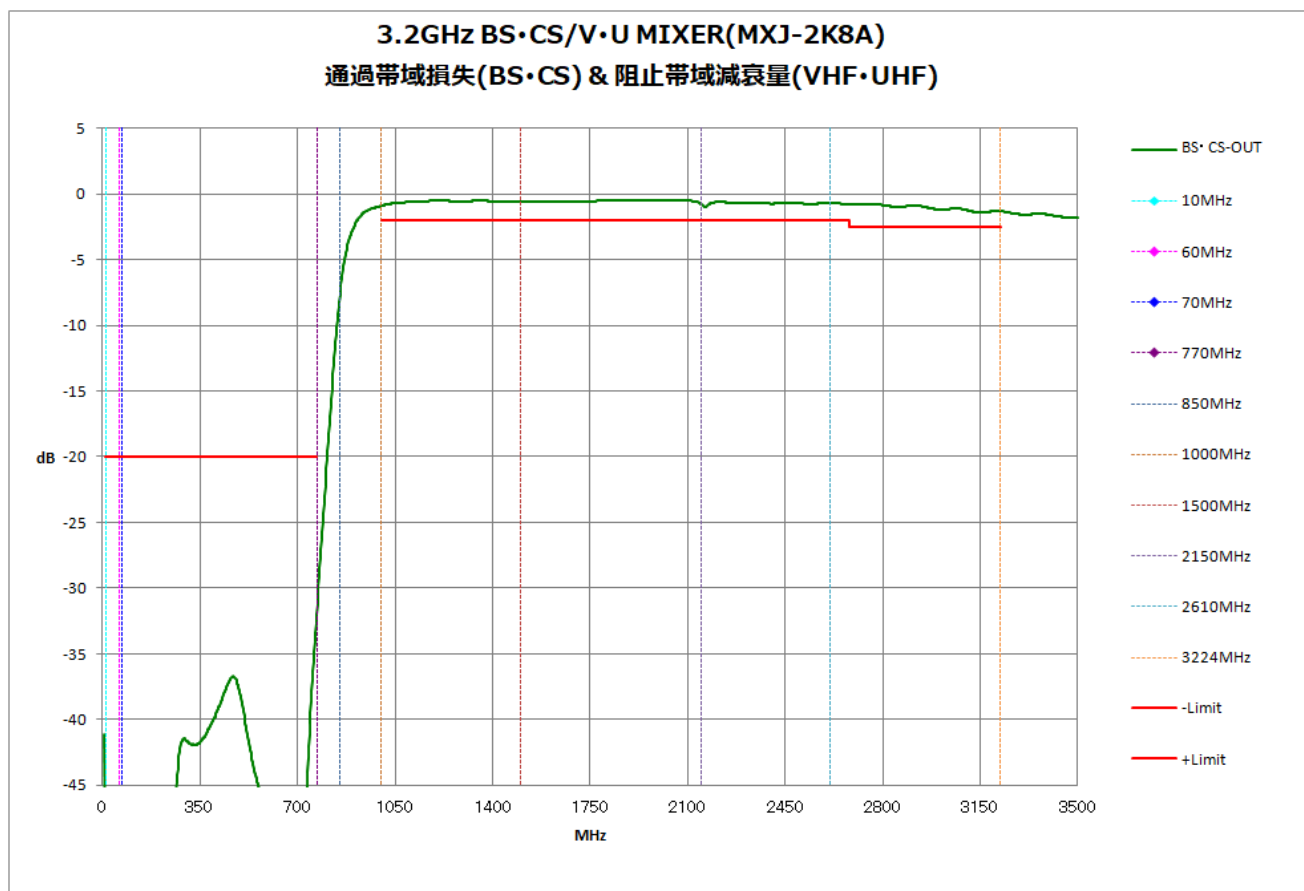

f	阻止帯域減衰量 (V・U)	f	通過帯域損失 (BS・CS)
60MHz	-56.890	1000MHz	-0.933
70MHz	-56.989	1500MHz	-0.598
770MHz	-31.199	3224MHz	-1.322

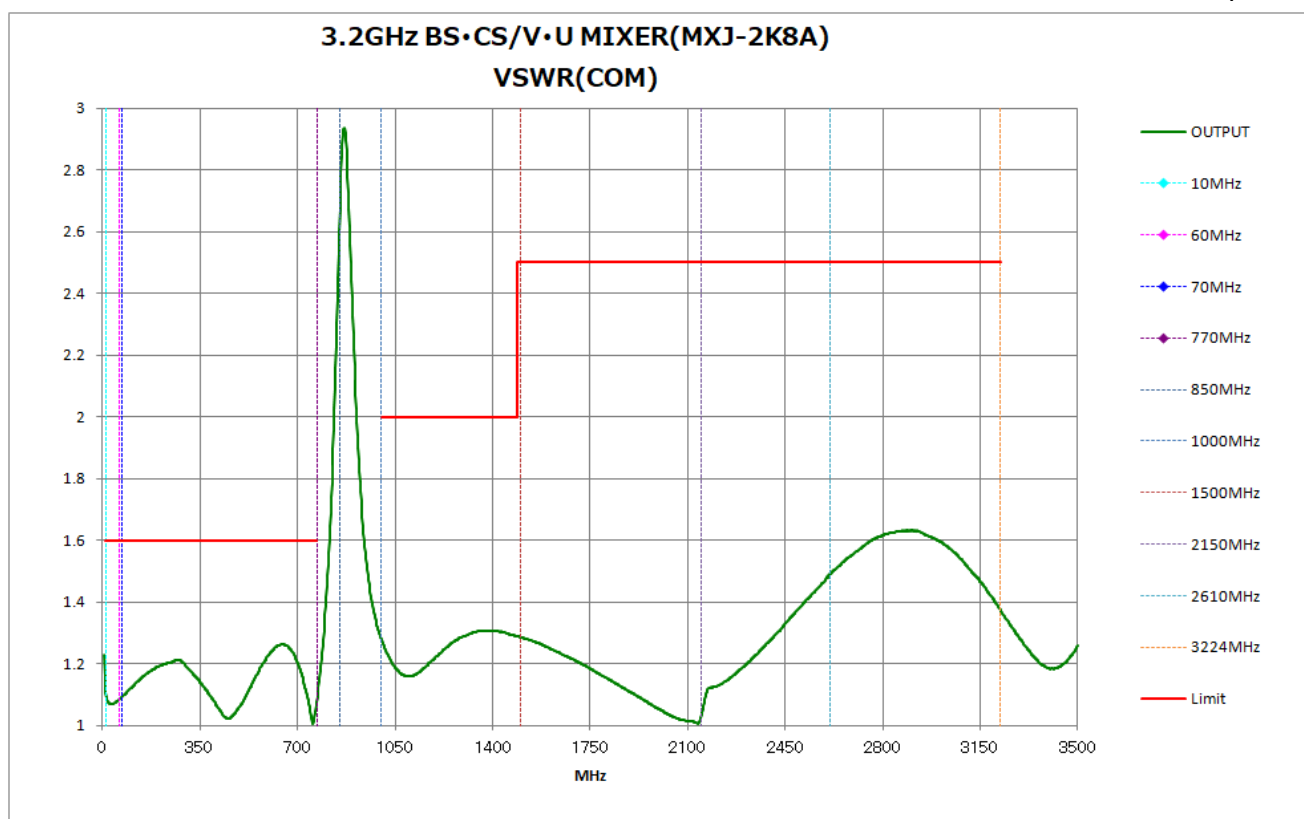


f	VSWR (V・U)	f	VSWR (BS・CS)
60MHz	1.084	1000MHz	1.285
70MHz	1.093	1500MHz	1.286
770MHz	1.092	3224MHz	1.371

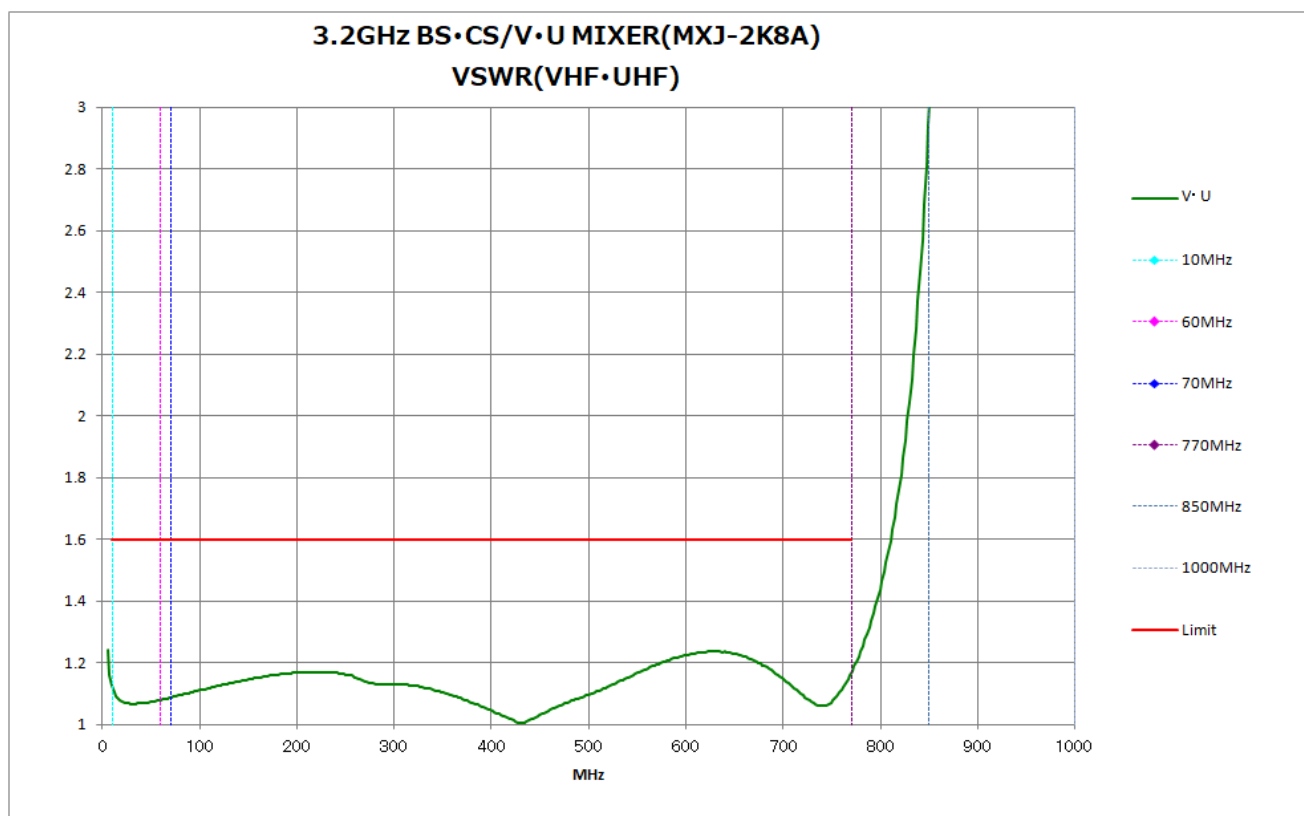

f	VSWR (V・U)
60MHz	1.079
70MHz	1.087
770MHz	1.174

【 RF 伝送特性データ 】

4/4

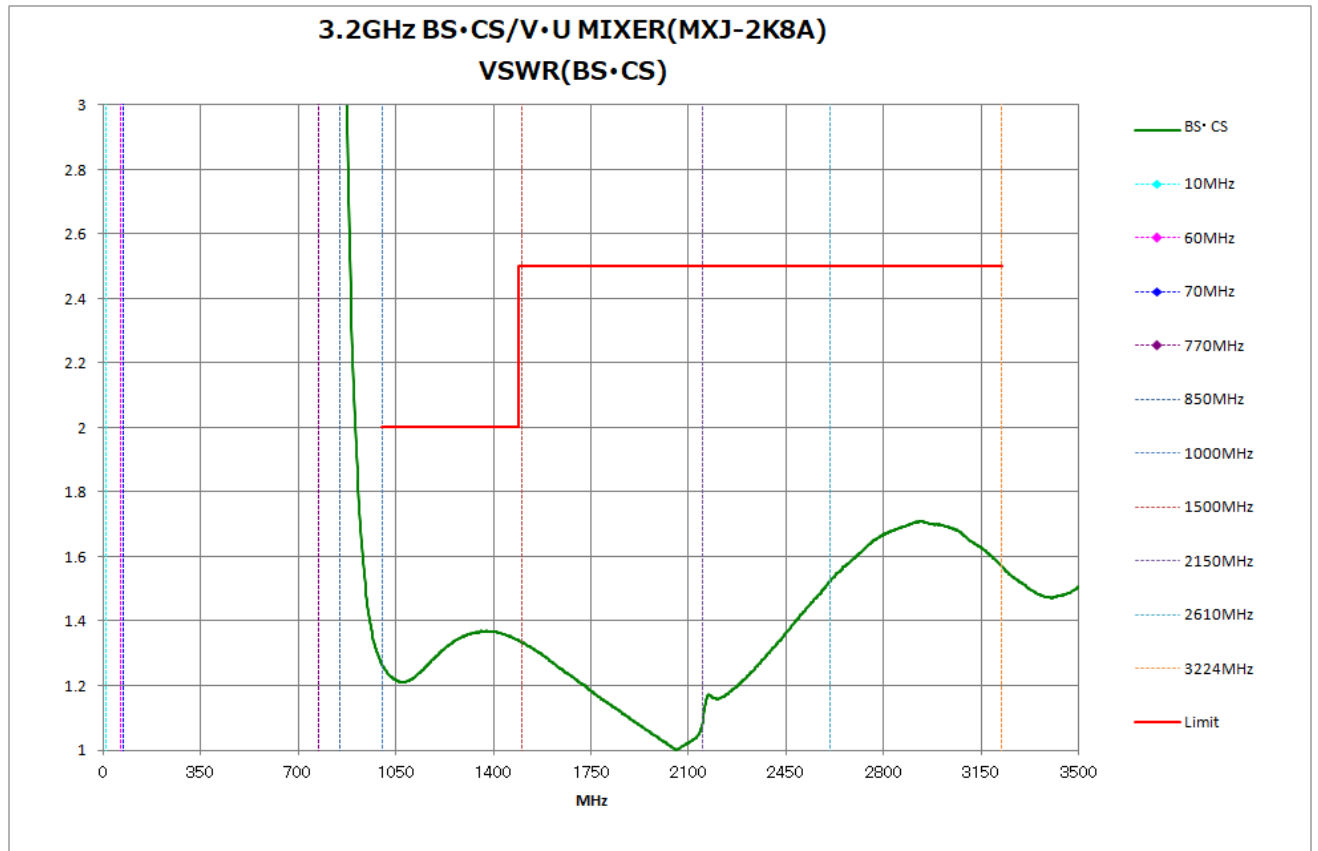

f	VSWR (BS・CS)
1000MHz	1.268
1500MHz	1.335
3224MHz	1.571