



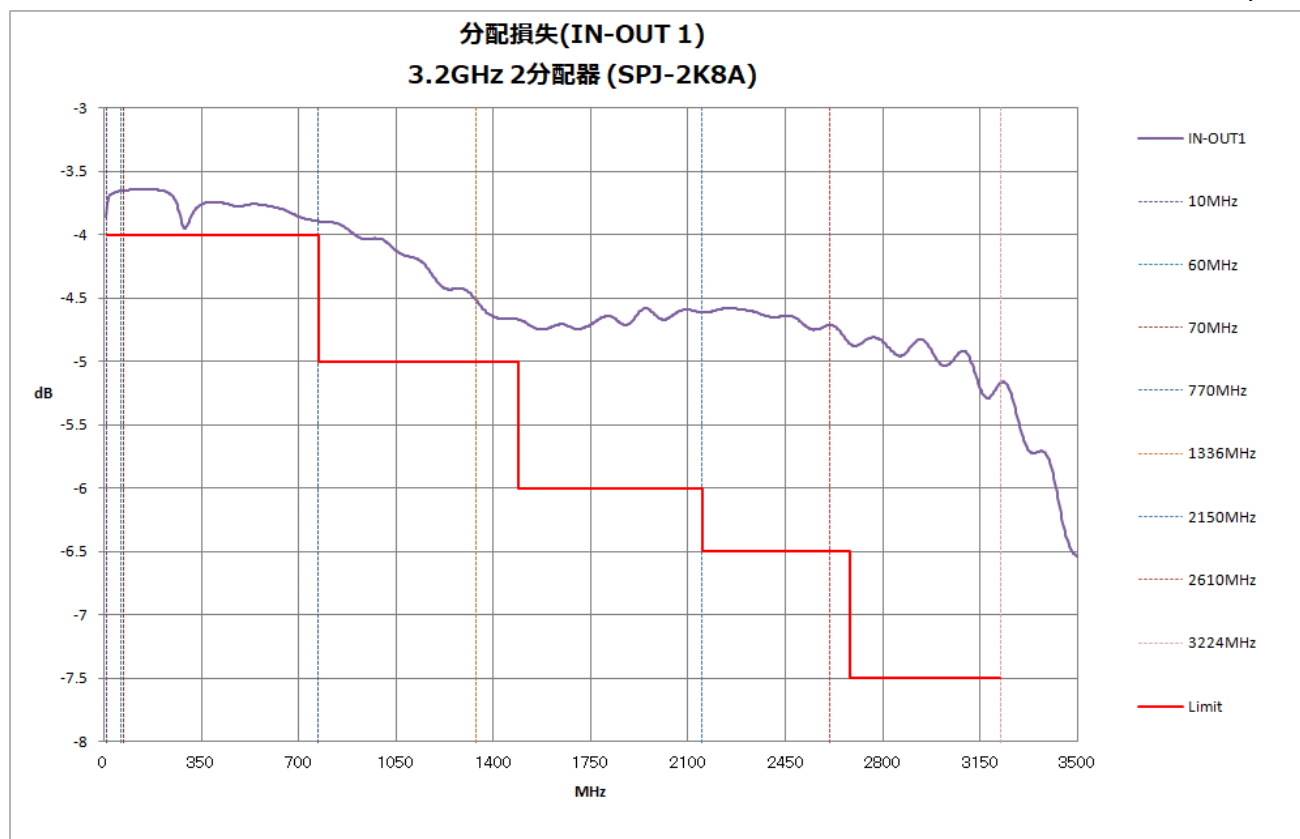


| f     | 分配損失 (IN-OUT1) | f       | 分配損失 (IN-OUT1) |
|-------|----------------|---------|----------------|
| 60MHz | -3.656         | 850MHz  | -3.921         |
| 70MHz | -3.651         | 1500MHz | -4.678         |

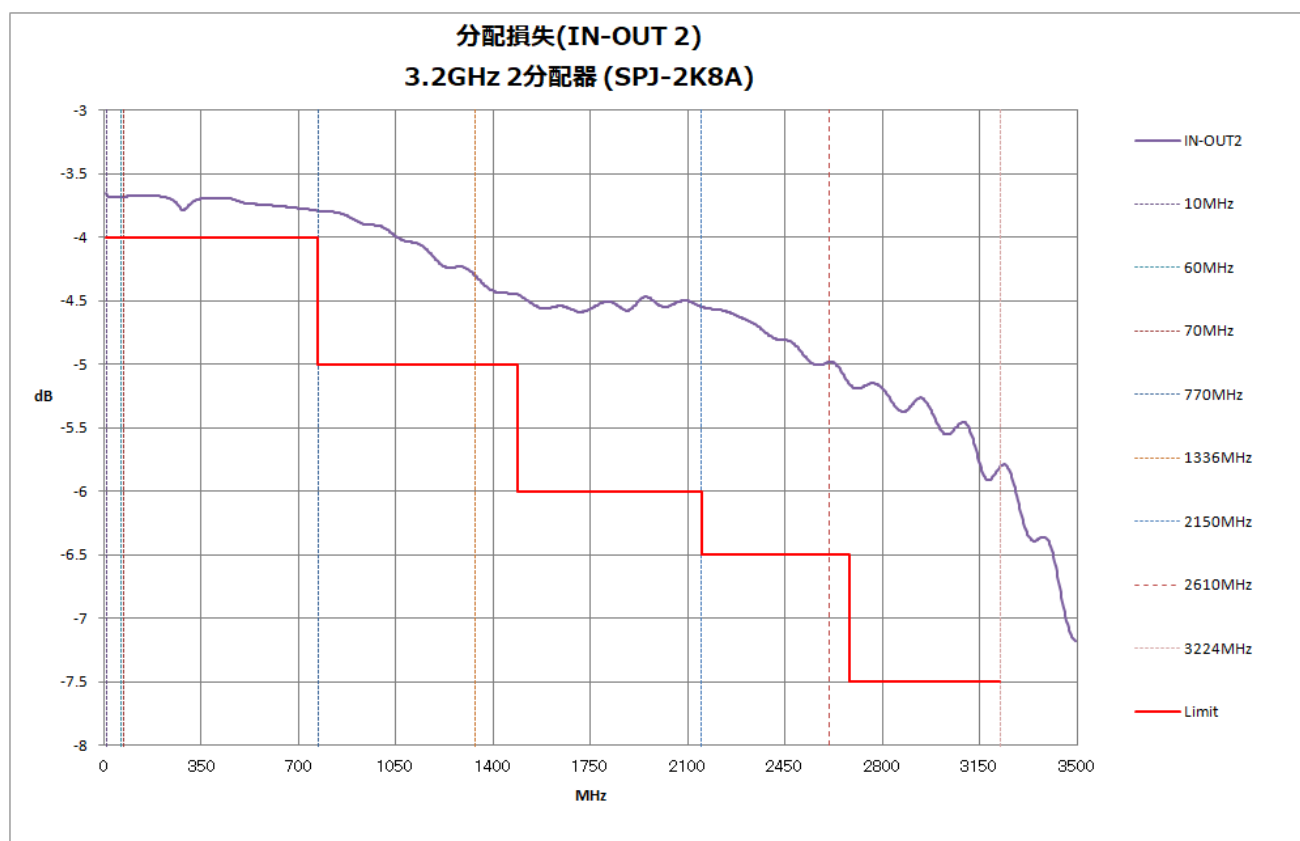


| f     | 分配損失 (IN-OUT2) | f       | 分配損失 (IN-OUT2) |
|-------|----------------|---------|----------------|
| 60MHz | -3.684         | 850MHz  | -3.812         |
| 70MHz | -3.682         | 1500MHz | -4.466         |

端子間結合損失(OUT 1-OUT 2)  
3.2GHz 2分配器 (SPJ-2K8A)

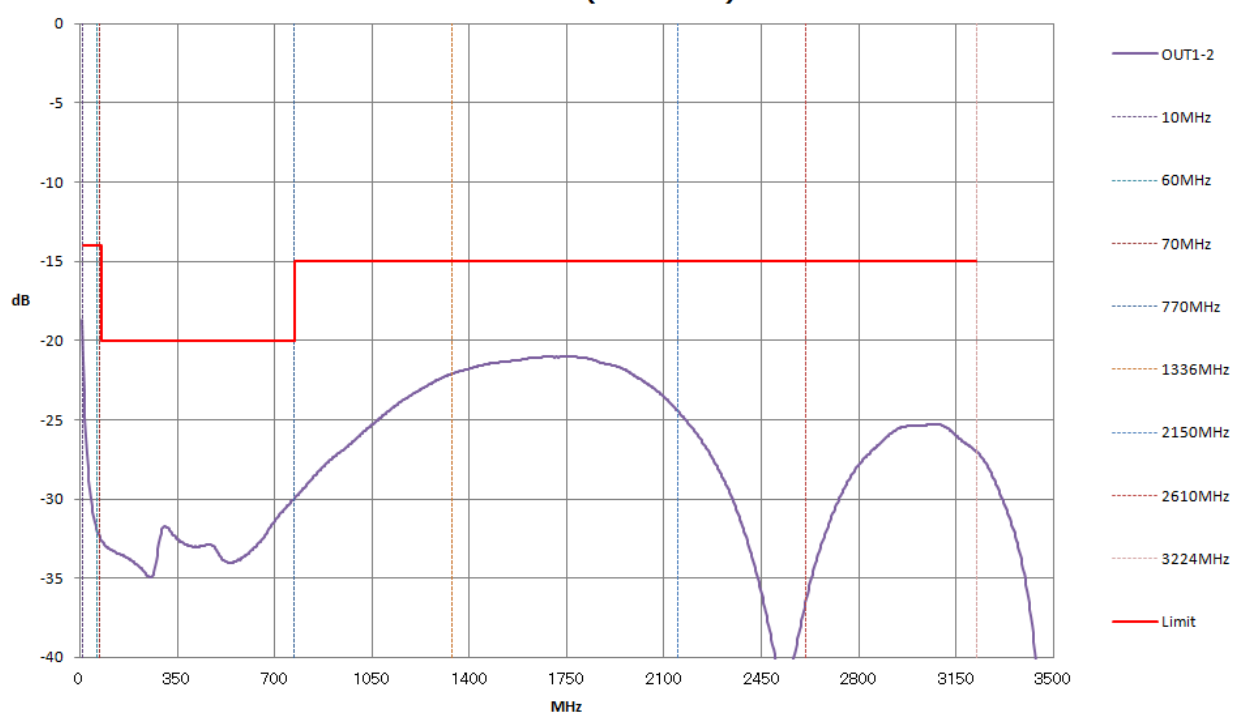


| f     | 端子間損失 (OUT1-2) | f       | 端子間損失 (OUT1-2) |
|-------|----------------|---------|----------------|
| 60MHz | -31.923        | 850MHz  | -28.403        |
| 70MHz | -32.391        | 1500MHz | -21.387        |


VSWR(IN)  
3.2GHz 2分配器 (SPJ-2K8A)

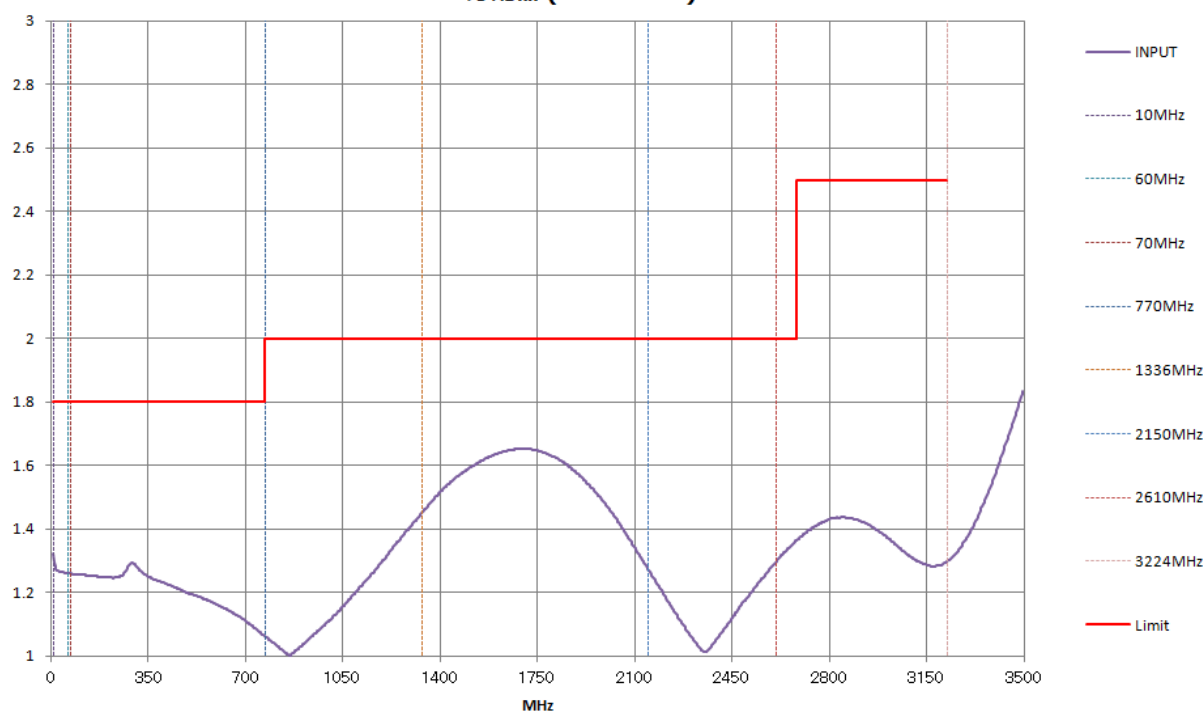

| f     | VSWR (IN) | f       | VSWR (IN) |
|-------|-----------|---------|-----------|
| 60MHz | 1.261     | 850MHz  | 1.006     |
| 70MHz | 1.260     | 1500MHz | 1.591     |

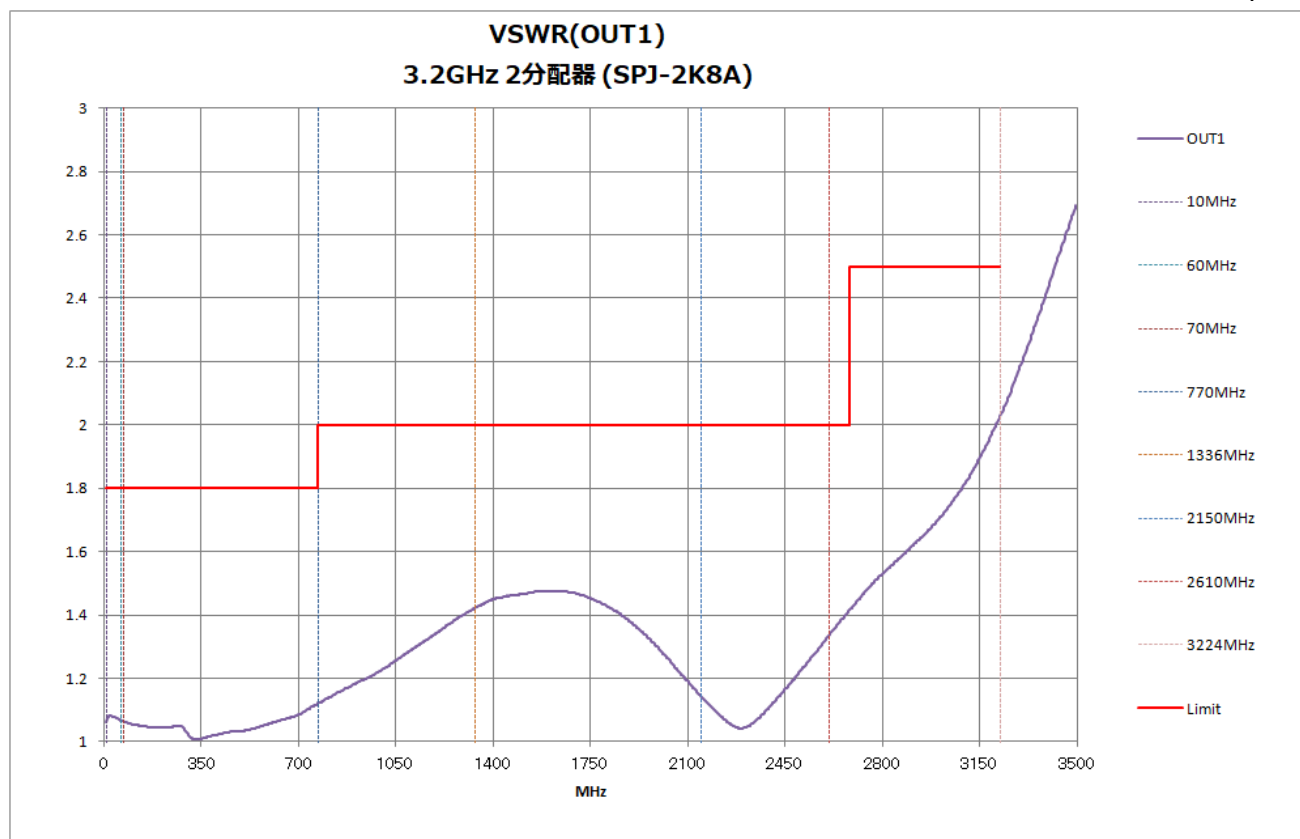

| f     | VSWR (OUT1) | f       | VSWR (OUT1) |
|-------|-------------|---------|-------------|
| 60MHz | 1.067       | 850MHz  | 1.158       |
| 70MHz | 1.063       | 1500MHz | 1.465       |

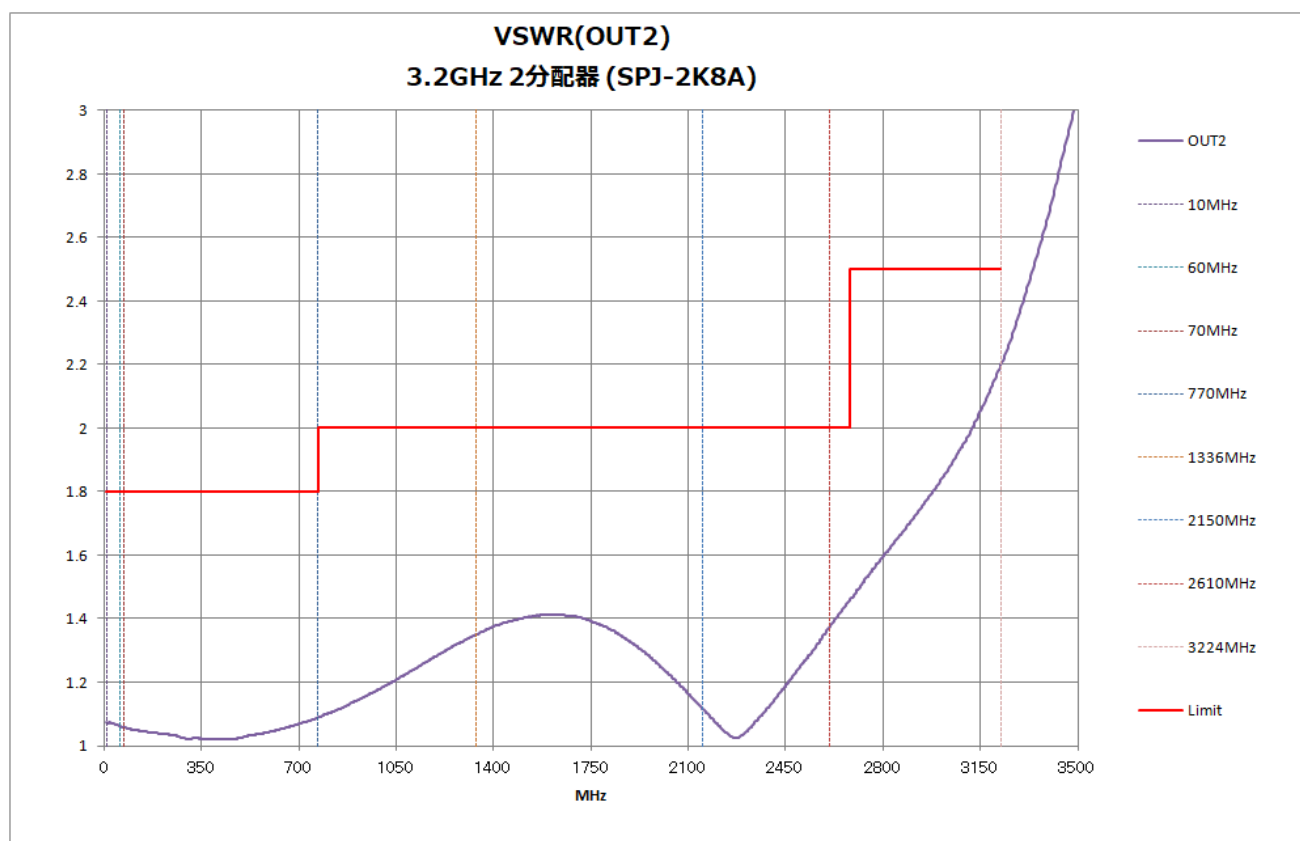

| f     | VSWR (OUT2) | f       | VSWR (OUT2) |
|-------|-------------|---------|-------------|
| 60MHz | 1.060       | 850MHz  | 1.117       |
| 70MHz | 1.057       | 1500MHz | 1.401       |